

USE AND ACTIVATION SYSTEM

Dispenser works in **behind the bar** mode (no wine card) or self service (with wine card or barcode reader*).



SERVICE TEMPERATURES

Controlled temperature from 5° to 18°C (41° to 65°F).



DOSAGES

Up to three different dosage through high quality mechanical buttons.



SOFTWARE CONNECTION

Connection between modules and software through LAN wire and WI/FI* with TCP/IP protocol.



BOTTLES LIFTING SYSTEM

Lifting system with pneumatic pistons.



WINE CARD

Chip card system.



REFRIGERATION SYSTEM

Use of modern no-frost professional cooling system.



GAS

Nitrogen or food grade Argon (cylinder or generator not included).



CUSTOMIZATIONS

Machine color can be customized, Front panel can be silkscreened*



LED ILLUMINATION

Intelligent led RGB system for an infinite variety of color combinations*.



SAFETY


The dispenser comes with a key lock.



FLEX TECHNOLOGY

Thanks to the flex technology, it is possible to have multiple combination for the dispensers.

SPACE REQUIREMENTS

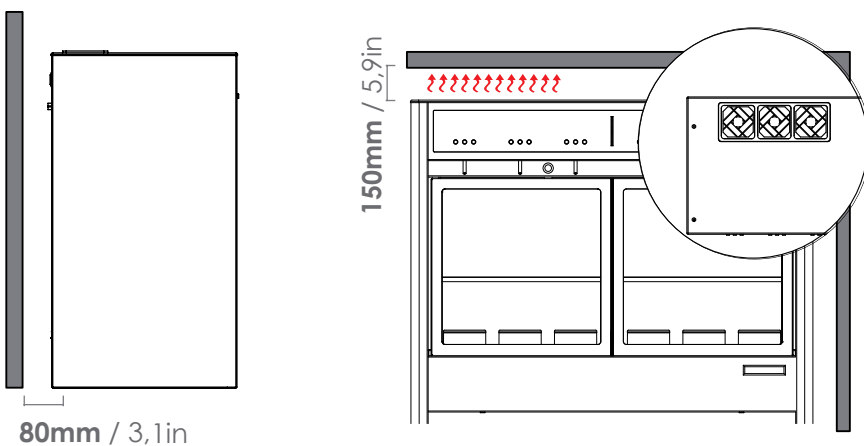

US PLUG SPECS


*Optional

NEMA RECEPTACLE 5-15r



TECHNICAL SPECIFICATIONS

WIDTH	677mm 26,65in
HEIGHT	632mm 24.9in
DEPTH	351mm 13.83n
WEIGHT CT	54kg 119lbs

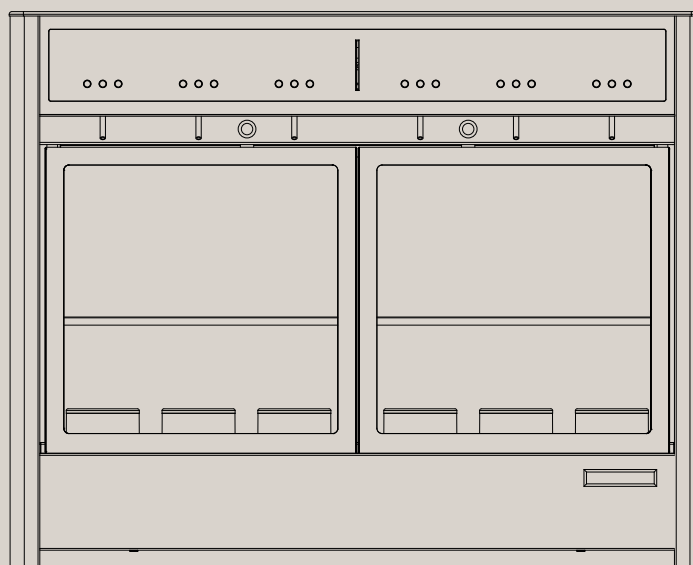

MODELS

DISPENSER	ORDER CODE	REFRIGERATION	ELECTRICAL REQUIREMENTS
SEI - US & CANADA	S306623424201	ONE TEMPERATURE	110VAC 60Hz - 2,0A - 250w max
TRE + 3 - US & CANADA	S306923424241	DUAL TEMPERATURE	110VAC 60Hz - 2,2A - 250w max
DUE + 4 - US & CANADA	S306A23424281	DUAL TEMPERATURE	110VAC 60Hz - 2,2A - 250w max
SEI - EU/WORLD	S306633434301	ONE TEMPERATURE	220VAC 50Hz - 1,0A - 250w max
TRE +3 - EU/WORLD	S306933434341	DUAL TEMPERATURE	220VAC 50Hz - 1,1A - 250w max
DUE + 4 - EU/WORLD	S306A33434381	DUAL TEMPERATURE	220VAC 50Hz - 1,1A - 250w max

CERTIFICATIONS

USA & CANADA 110VAC 60Hz

NSF 25
UL 751
UL 541
CSA C22.2 #128



EUROPE & WORLD 220VAC 50Hz

NSF 25
IEC 60335-1
IEC 60335-2-75
IEC 60335-2-24

